



DESCRIPTION

ALZ 3822 is a general purpose submersible hydrostatic level transmitter with detachable probe, allowing quick and easy removal for service or replacement. High quality silicon piezoresistive sensor, plastic housing and a hydrometric cable with the ventilation tube make ALZ 3822 a reliable solution for a wide variety of industrial level measurement applications.

SPECIFICATIONS

Ranges: 1 mH₂O up to 100 mH₂O

Basic accuracy: ±0.25%

Probe: Ø35 mm, plastic, detachable from the cable for easy service

Outputs: 4...20 mA; 0...20 mA; 0...10 V; 0...5 V; RS-485 / Modbus RTU

Sensor: silicon piezoresistive

Media temperature: -20...+70 °C

Optional: HART®

APPLICATIONS

Water, wastewater

Fuels, oils

Tanks, wells

Pump protection

TECHNICAL SPECIFICATIONS

MEASURING RANGES

Pressure range, bar	Level, mH ₂ O	Overpressure, bar	Pressure range, bar	Level, mH ₂ O	Overpressure, bar
0...0.10	1.0	1.0	0...1.6	10	6.0
0...0.16	1.6	1.0	0...2.5	25	6.0
0...0.25	2.5	1.0	0...4.0	40	15
0...0.40	4.0	1.0	0...6.0	60	15
0...0.60	6.0	3.0	0...10	100	30
0...1.0	10	3.0			

PERFORMANCE	P > 0.4 bar	P ≤ 0.4 bar
Accuracy, % of span*	≤ ±0.25 (standard) / 0.20 (optional)	≤ ±0.5 (standard)
Temperature effect (% of span / 10 °C)	≤ ±0.1	≤ ±0.2
Compensated range	-20...+50 °C	0...+50 °C
Power supply effect	≤ ±0.05% of span / 10 V	
Load resistance effect	≤ ±0.05% of span / kOhm (transmitters with current output)	
Long-term stability	≤ ±0.1% of span / year	
Response time (10...90%)	≤ 1 ms with analog output, ≤ 200 ms with digital output	

* Accuracy includes non-linearity, hysteresis and non-repeatability.

OPERATING CONDITIONS

Medium temperature (depends on seal)	-20...+50 °C
Ambient temperature	-20...+50 °C
Storage temperature	-20...+50 °C
Service life	> 100 x 10 ⁶ cycles

MECHANICAL SPECIFICATIONS

Housing	PVC
Seal	FKM; EPDM; NBR
Diaphragm	stainless steel 316L (1.4435)
Cable external jacket	PVC, PUR, FEP
Ingress protection	IP69K

ELECTRICAL SPECIFICATIONS


Output signal	Power supply, U_s	Load resistance, R	Power consumption
4...20 mA / 2-wire	12...36 V	$\leq [(U_s - 12 \text{ V}) / 0.02 \text{ A}] \text{ Ohm}^*$	$\leq 26 \text{ mA}$
4...20 mA / HART®			
4...20 mA / 3-wire	12...36 V	$\leq 500 \text{ Ohm}$	$< 7 \text{ mA}$
0...20 mA / 3-wire		$\geq 10 \text{ kOhm}$	
0...10 V / 3-wire		$\geq 5 \text{ kOhm}$	
0...5 V / 3-wire			
0.5...4.5 V / 3-wire	5 V	$\leq 5 \text{ kOhm}$	$\leq 2 \text{ mA}$
0.5...4.5 V / 3-wire	6...15 V		$\leq 7 \text{ mA}$
RS-485 / Modbus RTU	12...36 V	-	$\leq 7 \text{ mA}$

* For output signal 4...20 mA / HART® minimum load resistance for digital communication: 250 Ohm.

ELECTRICAL CONNECTIONS / PIN ASSIGNMENT

Circuits		Cable gland wires
2-wire	power +	white (red)
	power -	brown (blue)
	ground	yellow-green
3-wire	power +	white (red)
	power -	brown (blue)
	signal +	green (black)
	ground	yellow-green
Pt100 (optional)	T+	yellow
	T-	pink (white)
	T-	gray (green)
RS-485	power +	white (red)
	power -	brown (blue)
	A	yellow
	B	green (black)
	ground	yellow-green
HART®	power +	white
	power -	brown
	ground	yellow-green

DIMENSIONS (mm)

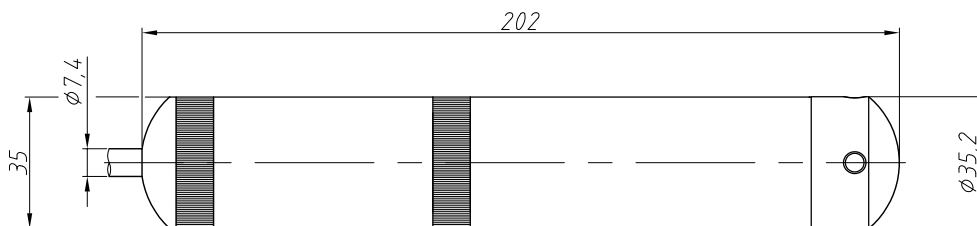

ORDERING CODE

ALZ 3822		-X	-XXXX	-X	-X	-XXXX	-X	-X	-XX
UNIT OF MEASUREMENT									
bar		B							
kg/cm ²		S							
mH ₂ O		W							
kPa		H							
Other (specify when ordering)		X							
UPPER RANGE LIMIT (URL)									
bar, kg/cm ²		mH ₂ O		kPa					
0.10	0100	1.0	1000	10	1001				
0.16	0160	1.6	1600	16	1601				
0.25	0250	2.5	2500	25	2501				
0.40	0400	4.0	4000	40	4001				
0.60	0600	6.0	6000	60	6001				
1.0	1000	10	1001	100	1002				
1.6	1600	16	1601	160	1602				
2.5	2500	25	2501	250	2502				
4.0	4000	40	4001	400	4002				
6.0	6000	60	6001	600	6002				
10	1001	100	1002	1000	1003				
Other	XXXX	Other	XXXX	Other	XXXX				
ACCURACY									
0.25% (P > 0.4 bar) (standard)				C					
0.50% (P ≤ 0.4 bar) (standard)				D					
0.20% (P > 0.4 bar)				B					
Other (specify when ordering)				X					
CABLE EXTERNAL JACKET									
				PVC	P				
				PUR	U				
				FEP	T				
				Other (specify when ordering)	X				
CABLE LENGTH									
Any length in meters (e.g., 010M means 10 meters)						XXXM			
OUTPUT SIGNAL									
				4...20 mA / 2-wire	A				
				4...20 mA / 3-wire	B				
				0...20 mA / 3-wire	C				
				0...10 V / 3-wire	D				
				0...5 V / 3-wire	E				
				0.5...4.5 V / 3-wire, U _s = 5 V	R				
				0.5...4.5 V / 3-wire, U _s = 6...15 V	K				
				RS-485 / Modbus RTU	M				
				4...20 mA / HART®	H				
				Other (specify when ordering)	X				

ORDERING CODE (CONTINUED)

	ALZ 3822	-X	-XXXX	-X	-X	-XXXX	-X	-X	-XX
SEALS									
							FKM	F	
							NBR	N	
							EPDM	E	
							Other (specify when ordering)	X	
VERSION								Standard	00
								Other (specify when ordering)	XX

Example: ALZ 3822-W-6000-D-P-010M-A-F-00

ACCESSORIES

				
Anchoring clamp for submersible transmitter	PZ 1024 Power supply unit	BZ 05 / BZ 10 Dry air junction box for submersible transmitters		